



ELV/MLV/Triac Dim Constant Voltage

ELV/MLV/Triac Dim Constant Voltage LED Electronic Transformer

ELV/MLV/可控硅调光恒压LED电子变压器

Features


特性

- | | |
|--|--|
| <ul style="list-style-type: none"> ● Dimming Mode: Triac/ ELV/ MLV dimming ● 120Vac Input, 0-100% Dimming Range ● THD<20%@120V Max. load ● Build in active PFC, typical power factor=0.98 ● Super low loading request, works perfect at 20-100% load. ● Short-circuit, over-load protection. ● Aluminum housing, for dry,damp,wet ● UL, FCC, Class 2, Type HL, 5 years warranty ● Compatible with popular dimmers in the market, ● Lutron-CL, Diva series and so on | <p>调光方式: Triac/ELV/MLV调光</p> <p>120Vac 输入, 0-100%调光范围</p> <p>THD<20%@120V Max. 加载</p> <p>内置有源PFC, 典型功率因数=0.98</p> <p>超低负载要求, 20-100%负载下完美运行。</p> <p>短路、过载保护。</p> <p>铝制外壳, 适用于干燥、潮湿的地方</p> <p>UL、FCC、2类、Type HL、5年质保</p> <p>兼容市场上流行的调光器, Lutron-CL、Diva系列等</p> |
|--|--|

Optional Shell

可选外壳

SET- XXYYA

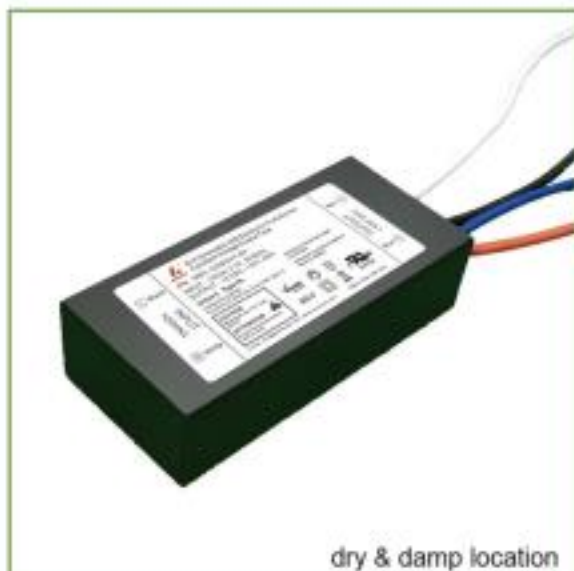

dry & damp location

DC 12V 24V , 60W 96W
Aluminum IP67

SET- XXYYB



dry & damp location

DC 12V 24V , 60W 96W
Aluminum

SET- XXYYJ





dry,damp,wet

DC 12V 24V , 60W 96W 120W 180W 192W 288W
Built-in Junction Box
Metal Housing

Model 型号	Cover Material 外壳材质	Output Voltage 输出电压 (Vdc)	Output Current 输出电流 (Amp)	Output power 输出功率 (Watt)	Product Size 尺寸 (mm)	N/W 净重 (g)	
SET-12060A	Aluminum(IP67)	12V	5.0A	60W	72*39*22.5	160	
SET-24060A		24V	2.5A	60W	72*39*22.5	160	
SET-24096A		24V	4.0A	96W	84*40*25	160	
LED Electronic Transformer Paired with separate Junction Box							
SET-12060B	Aluminum	12V	5A	60W	106*89*33.5	350	
SET-24060B		24V	2.5A	60W	106*89*33.5	350	
SET-24096B		24V	4A	96W	106*89*33.5	350	
LED Electronic Transformer & Junction Box combined together (2 in 1)							
SET-12060J	Metal Housing (NEMA 4X)	12V	5A	60W	128*120.5*42	800	
SET-24060J		24V	2.5A	60W	128*120.5*42	800	
SET-24096J		24V	4A	96W	128*120.5*42	800	
SET-12120J		12V	10A	120W	188*120.5*42	1100	
SET-24120J		24V	5A	120W	188*120.5*42	1100	
SET-12150J		12V	12.5A	150W	188*120.5*42	1100	
SET-24150J		24V	6.25A	150W	188*120.5*42	1100	
SET-12200J		12V	16.67A	200W	188*120.5*42	1100	
SET-24200J		24V	8.33A	200W	188*120.5*42	1100	
SET-12300J		12V	25A	300W	258*120.5*42	1500	
SET-24300J		24V	12.5A	300W	258*120.5*42	1500	
High Power Class 2 120W-288W							
SET-12120J		Metal Housing (NEMA 4X)	12V	5A*2	60W*2	188*120.5*42	1100
SET-12180J	12V		5A*3	60W*3	258*120.5*42	1500	
SET-24192J	24V		4A*2	96W*2	188*120.5*42	1100	
SET-24288J	24V		4A*3	96W*3	258*120.5*42	1500	

Wiring Diagram

接线图

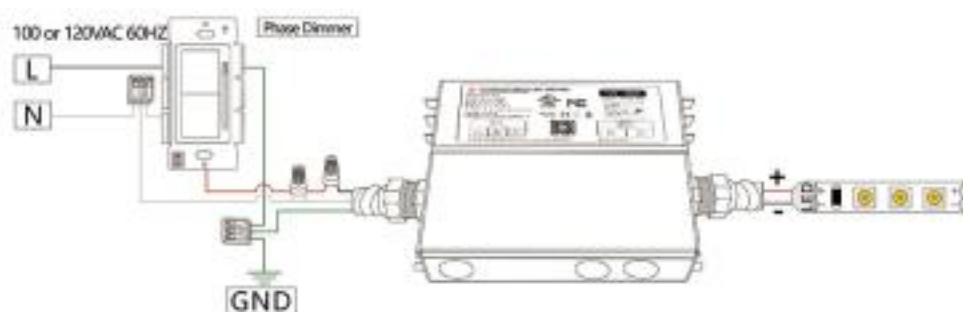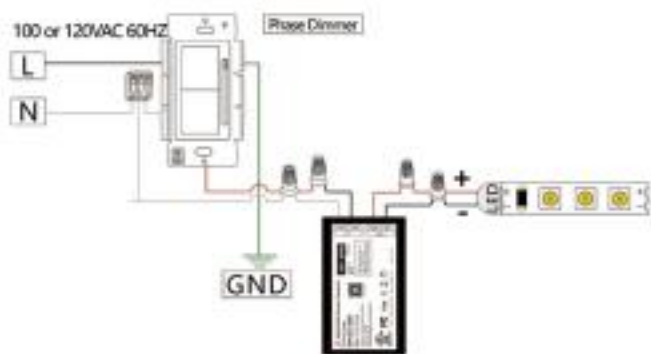

High Power Class 2 (e.g.: 288W)